

Solidtronic

Radio Over IP Gateway ST-RoIP3-WalkieFleet


A Cost Effective, Excellent Performance, Standalone Radio-over-IP Gateway

The ST-RoIP3 standalone Radio over IP Gateway is designed to interconnect mobile phone and 2-way radio users, or bridge 2-way radio systems across channels or sites.

The ST-RoIP3-WalkieFleet is equipped with the 3rd generation Super Dynamic Intelligent Digital Audio Tracking System(iDats III), the Android 4.0.3 OS with 3rd party communication app WalkieFleet and powered by an ARM CPU, brings you the fast and stable push-to-talk communication between any device, anytime and anywhere over the world!




SYSTEM DIAGRAMS

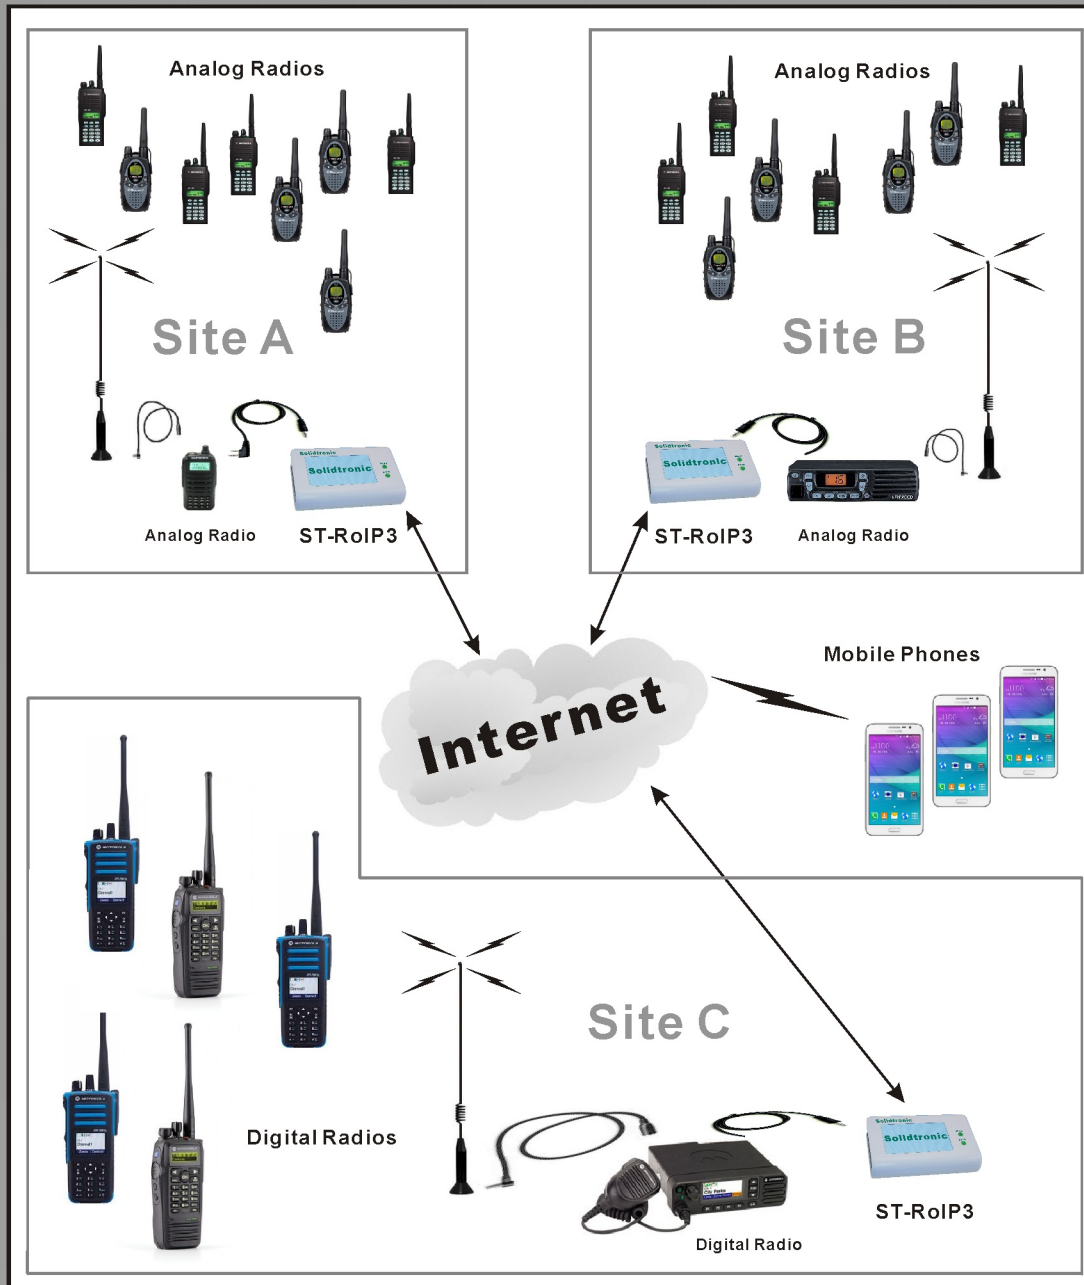

CABLES

(Selection Item)

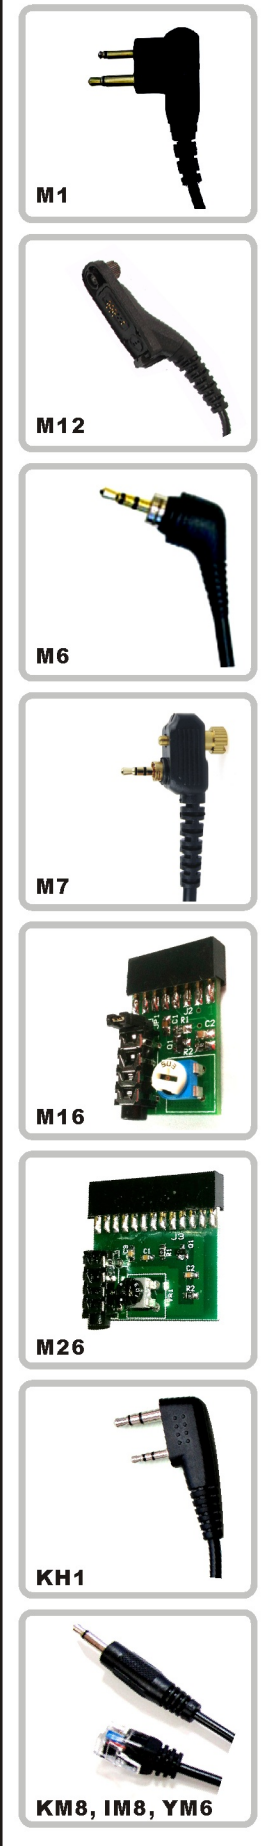

SPECIFICATIONS

| | |
|---------------------------------|----------------------------------|
| Power Supply | DC 5V |
| Power Consumption | 600mA (Typical) |
| Ethernet | 10/100 Base-T |
| CPU | ARM |
| Display | 4.3" Touch Screen LCD |
| Control Buttons | Menu and Back |
| Pre-installed Communication App | WalkieFleet |
| Carrier Detect Activation Time | < 1/2 Seconds |
| Digital Interconnect Stabilizer | Disable or Enable selectable |
| Dimensions | 160(W) x 100(D) x 40(H) mm |
| Weight | 450 g |
| AC Adaptor | Input AC100-240V, Output DC5V 2A |

1. Weight and dimensions indicated are approximate.
 2. Specifications are subject to change without notice.

Solidtronic is the trademark of
 Innotek Company Limited
www.solidtronic.com
 [st-roip3-walkiefleet-c1]